



Rec'd PCT/PTO 24 JAN 2005 PCT/GB 2003 / 0 0 3 2 6 0



24 JAN 2005



INVESTOR IN PEOPLE

10/522220

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 16 SEP 2003

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

*H. Behan*

Dated 28 August 2003

## Best Available Copy

An Executive Agency of the Department of Trade and Industry

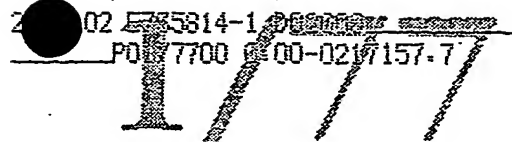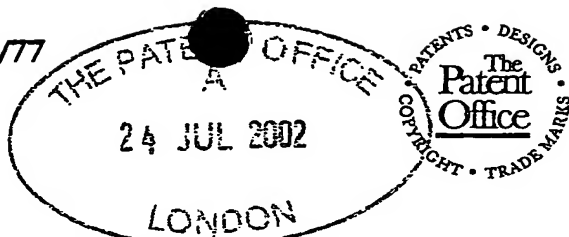

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference MCM/PWJ/24648GB

2. Patent application number  
(The Patent Office will fill in this part) 24 JUL 2002 0217157.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)  
Harada Industries (Europe) Limited  
Bell Heath Way  
Woodgate Business Park  
Clapgate Lane  
Birmingham B32 3BZ  
United Kingdom  
07417777 001  
Patents ADP number (if you know it)  
If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention Integrated Loop Antenna For Vehicular Applications

5. Name of your agent (if you have one)  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
MATHYS & SQUIRE  
100 Gray's Inn Road  
London WC1X 8AL  
United Kingdom  
1081001  
Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d)) YES

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

### Continuation sheets of this form

Description	12
Claim(s)	4
Abstract	1
Drawing(s)	5 + 5

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	-
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11.

I/We request the grant of a patent on the basis of this application.

Signature

MATHYS & SQUIRE

Date

24/7/02

12. Name and daytime telephone number of person to contact in the United Kingdom

Michael C Moir - 020 7830 0000

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

# INTEGRATED LOOP ANTENNA FOR VEHICULAR APPLICATIONS

## BACKGROUND OF THE INVENTION

The present invention relates to a vehicular antenna system and, more particularly, to a system that includes a configuration for a loop antenna which enhances  
5 reception performance.

Antennas integrated into parts of a vehicle are known. One approach is to use the de-misting heater grid on the rear screen as part of the antenna; see Japanese Application No. 13/22005. Such an arrangement may be  
10 used with a separate element for AM reception; see EP Application No. 0 155 647.

Some vehicles provide a suitable dielectric surface onto which a dedicated antenna element pattern can be formed. One example is the rear quarter window on a  
15 station wagon (estate car). Such windows are fixed, which allows the printing of a suitable antenna pattern. For example, the use of separate patterns to provide FM and AM radio reception was proposed in US Patent 3,771, 159. Combining a pattern on a side window with elements  
20 on other windows to improve pattern coverage was proposed in EP Application No. 0 854 533.

A major problem with implementation of an antenna element on a rear quarter window of a vehicle is polarisation. Often the signal feedline needs to connect to the  
25 bottom of the window because of space limitations at the top and sides of the window frame. This means that the

primary antenna currents are extending vertically, and there then exists correspondingly less horizontal polarisation ("horizontal polarisation" here signifying the horizontally-polarized component of the antenna signal). This causes problems for markets where broadcast signals are predominantly horizontally-polarised.

#### SUMMARY OF THE INVENTION

The present invention is a loop-type screen antenna that at least in its preferred embodiments is intended to address the foregoing problems.

A vehicular screen antenna of the invention is adapted to be fitted to a vehicle so as to extend generally vertically, and includes a conductor extending on a dielectric. The conductor is configured as a loop having entry and exit segments that extend proximate each other from the loop towards an edge of the dielectric and are oriented on the dielectric so as to extend generally vertically when the dielectric is fitted to a vehicle. During use of the antenna, a horizontally-polarized component of a signal on the antenna has a magnitude at least approximating that of a vertically-polarized component of the signal. The words "generally vertically" are intended to be interpreted broadly herein to mean "at a substantial angle to the horizontal".

Preferably, the entry and exit segments join the loop proximate each other and a corner of the loop.

Preferably, when the dielectric is fitted to the vehicle, the first edge of the dielectric is a bottom edge. In such arrangement, the entry and exit segments may join the loop proximate each other and a corner of the loop.

Preferably, the dielectric is a window of the vehicle.

In a first embodiment, at the first edge of the dielectric the entry segment may be adapted to connect to a feedline, and the exit segment adapted to connect to vehicle ground.

In a second embodiment, at the first edge of the dielectric the entry segment may be adapted to connect to a feedline, and the exit segment to connect to a stub segment that extends generally parallel to the first edge of the dielectric for capacitive coupling to vehicle ground. In this embodiment, the stub segment may be adapted to be separated less than approximately 5mm from a vehicle ground surface proximate the first edge of the dielectric. The length of the stub segment and its separation distance from the vehicle ground surface may be selected such that the stub segment is able to receive low-frequency broadcast signals (LW/MW/SW) typically described as "AM" (below 6 MHz).

In a third embodiment, at the first edge of the dielectric the entry segment may be adapted to connect to a feedline, and the exit segment to connect to one end of resonator circuitry the other end of which connects to

vehicle ground. The resonator circuitry may be formed by a discrete electronic circuit that includes an inductor means and a capacitor means connected in series. The resonator circuitry may also include a tuning means.

5        Preferably, the antenna includes a switch means for disconnecting the exit segment from a signal ground and connecting it instead to the entry segment.

      The loop may have a generally rectilinear configuration. Preferably, the loop is generally configured as a  
10    rectangle having its longer sides extending generally horizontally when the dielectric is fitted to the vehicle. More preferably, when the dielectric is fitted to the vehicle, the loop is extends at between approximately 50mm and approximately 100mm from the edges of the  
15    dielectric.

      The loop may be positioned generally centrally on the dielectric.

      Preferably, the dielectric is a rear window or a rear quarter window of a station wagon. More preferably,  
20    a signal feedline connectable to the entry segment is positioned on the body of the vehicle so as to be below a body aperture adapted to receive the respective rear window or rear quarter window and so as to be proximate a corner of the vehicle body.

## 25    BRIEF DESCRIPTION OF THE DRAWINGS

      Preferred features of the present invention will now be described, by way of example only, with reference to

the accompanying drawings, in which:-

Figure 1 illustrates a pattern of a first conventional screen antenna;

Figure 2 illustrates a pattern of a second conventional screen antenna, and current flow in the antenna;

Figure 3 illustrates a first embodiment of a screen antenna of this invention, the antenna including a stub ground element for a coupled ground connection;

Figure 4 illustrates current flow in the first embodiment of the screen antenna of this invention;

Figure 5 illustrates a second embodiment of the screen antenna of this invention, the antenna including resonator circuitry at the ground connection;

Figure 6 illustrates a third embodiment of the screen antenna of this invention, the antenna having a direct ground connection and no stub ground element;

Figure 7 is a graph comparing return loss for the loop antenna of Figure 3 (coupled ground connection) and the loop antenna of Figure 6 (direct ground connection);

Figure 8 is a graph comparing the sensitivity of a loop antenna with that of a rod antenna for AM signal reception; and,

Figures 9(a) and 9(b) are polar diagrams illustrating vertically-polarised and horizontally-polarised VHF signal reception, respectively, for the antenna element of the subject invention in comparison to a conventional antenna element.



## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

One conventional type of screen antenna has an antenna element formed on a dielectric surface in an aperture of a vehicle body, as illustrated in Figure 1.

5 The dielectric is normally a window. The antenna element is a simple monopole-type, fed at its base. The antenna currents are split equally between the antenna element and the car body. When such an antenna element is used on a rear quarter window, greatest-magnitude currents  
10 flow mainly vertically, resulting in an antenna with predominantly-vertical polarisation.

Another conventional type of screen antenna has an antenna element formed on a surface of a dielectric 8, as illustrated in Figure 2. In this case, a vertical feed  
15 wire 10 extends upward from a feed connection point 12 with a signal feedline 14 on the vehicle body to form one end of a closed loop generally designated 16. The loop 16 further consists of a pair of generally-parallel horizontal wires 18 and 20, and a vertical wire 22  
20 forming the other end of loop 16. This can operate at VHF frequencies and can also provide an AM element; however, the VHF performance for horizontal polarisation is not good. This is because this configuration can be considered equivalent to a simple L-shaped element having  
25 a vertical segment connecting to a horizontal segment that extends to the left, with the left end being an open free end. The current diminishes toward the free end, and as such, the currents 18A and 20A along the horizon-

tal wires 18 and 20 are small compared with the current 10A on the vertical feed wire 10; poor horizontal polarisation is the result.

Comparing the conventional structure of Figure 2 with the loop arrangement of the subject invention shown in Figure 3, it can be seen that the invention consists of opening the loop and adding to lower horizontal wire 20 another vertical wire 24 that is closely spaced to feed wire 10. The wire 24 in one embodiment of the invention connects to a stub antenna element 26 extending along the edge of the window, less than 5mm from the vehicle body. The length of the stub antenna element 26 is adjusted to give a low impedance at the feed point and at the centre frequency of the VHF band of interest. An unbalanced transmission line 28, such as formed by a coaxial cable 29, feeds the antenna as shown in Figure 3. The stub antenna element 26 is isolated from the rest of the antenna at low frequencies, enabling its use as an AM antenna (where "AM" here connotes low-frequency broadcast signals (LW/MW/SW) having a frequency below approximately 6 MHz).

Although the elements of the antenna loop have been described as being essentially horizontal and vertical, they might be angled for styling without major detriment. The antenna loop should be spaced away from the vehicle body to reduce excessive capacitive loading, yet be made as large as possible to increase bandwidth and reduce impedance. The separation between loop and car body

needs to be optimized for each application, but is typically 50mm to 100mm.

Typical resulting currents are shown in Figure 4. The current 18B along the wire 18 is much greater than the current 18A of the closed loop of Figure 2, with a resultant increase in horizontal polarisation. As in Figure 2, the current diminishes with distance from signal feedline 14; however, the distance has now been increased by introducing a return path to ground. Currents 10B and 18B are of comparable magnitude, but are each larger than the currents 22B, 20B and 24B on the respective return wires 22, 20 and 24.

The excitation current of the loop element of the invention is actually a combination of two current modes. The first current mode is the "odd" mode, which is similar to the conventional element of Figure 2, in which the return current to ground is zero. The second current mode is an "even" mode, whereby the current returning to ground connection point 26 is equal to the feed current. The net effect is a combination of two modes, and the combination will depend upon the physical structure and upon the wavelength of operation. Additionally, radiation also depends upon the "image" currents that flow in the body of the vehicle, close to connection point 12; however, such image currents are determined by the current structure on the element. The image currents 30 in the conventional case shown in Figure 2 are essentially vertical, whereas the image currents 32 for the loop

antenna of the subject invention, shown in Figure 4, have a more two-dimensional nature, i.e. both horizontal and vertical.

A second embodiment of the invention is illustrated in Figure 5. In this embodiment, the stub antenna 26 is not present, and the end of vertical wire 24 is connected to ground through a discrete series resonant circuit. The circuit is illustrated in Figure 5 by an inductor L connected in series with a capacitor C, but any resonator element with similar properties might be used. This configuration maintains the VHF performance but also allows AM reception, i.e. the resonator element gives an 'open circuit' at AM. The discrete series resonant circuit might include circuitry to allow variable tuning for wider bandwidth.

If AM reception is not required, then stub antenna element 26 is not present. This is a third embodiment of the invention, illustrated in Figure 6, in which a direct connection is made between return line 24 and a ground connection point 34 on the vehicle body, proximate to the feed connection point 12. This embodiment (as well as the other two) may include an electronic switch 36 (shown schematically in Fig. 6) for connecting return wire 24 with the feed line rather than the ground line. After such switching, the antenna operates in a similar way to the L-shaped antenna shown in Fig. 2. Thus, the inclusion of the switch 36 allows a switched performance for polarisation diversity, i.e. reducing the horizontal

polarisation while maintaining the vertical polarisation.

It has been found that if the loop antenna of the invention is placed in the rear quarter window of a car, improved omni-directionality can be obtained by placing the feed point to the rear. Horizontal components of the ground current can then flow onto the rear of the vehicle body, below the window, and these enhance the horizontal component in the plane orthogonal to the window, thereby achieving good omni-directionality for both horizontal and vertical polarisation.

Practically, the length of the antenna element on the dielectric is less than a wavelength, i.e. is less than the resonant length. This translates to a narrower bandwidth, as illustrated in the return loss graph of Figure 7; it is, however, wide enough for typical FM reception bandwidths, although some additional matching may be needed. The effect of using a coupled ground (stub antenna element 26 is present) is shown compared with using a direct ground. It can be seen that the stub antenna element performs well, with similar characteristics to the direct ground connection (a small amount of detuning is caused by the reactance of the stub). This is illustrated in Figure 8, using a high-impedance amplifier to buffer the element. The coupled ground can be optimized to tune the VHF receive band and to minimize the capacitive loading for AM reception.

Figures 9(a) and 9(b) illustrate typical polar diagrams for screen antennas printed on the rear quarter

window of a station wagon. Measurement is made at 98 MHz for both vertical and horizontal polarisations, using the proposed loop element of Figure 3 against the conventional loop element of Figure 2. An active matching  
5 circuit was used in both instances, providing around 5 dB of gain to each antenna (with received levels recorded in dBi). As expected, in the vertical plane the new open-loop element performs similarly to a conventional closed-loop element. However, for the horizontal plane the  
10 conventional closed-loop element is seen to have a poor horizontal component, while the new open-loop element is more omni-directional and provides greater horizontally-polarised gain, comparable to gain in the vertical plane.

While the present invention has been described in  
15 its preferred embodiments, it is to be understood that the words which have been used are words of description rather than limitation, and that changes may be made to the invention without departing from its scope as defined by the appended claims.

20 Each feature disclosed in this specification (which term includes the claims) and/or shown in the drawings may be incorporated in the invention independently of other disclosed and/or illustrated features.

The text of the abstract filed herewith is repeated  
25 here as part of the specification.

A vehicular screen antenna includes a conductor extending on a dielectric, such as a window. The conductor is configured as a loop having entry and exit

segments, the loop being positioned generally centrally on the dielectric. The entry and exit segments extend proximate each other from the loop towards a first edge of the dielectric and are oriented on the dielectric so  
5 as to extend generally vertically when the dielectric is fitted to a vehicle.

## CLAIMS:

1. A vehicular screen antenna adapted to be fitted to a vehicle so as to extend generally vertically, the antenna comprising a conductor extending on a dielectric, the conductor being configured as a loop having entry and exit segments that extend proximate each other from the loop towards an edge of the dielectric and are oriented on the dielectric so as to extend generally vertically when the dielectric is fitted to the vehicle, wherein during use of the antenna, a horizontally-polarized component of a signal on the antenna has a magnitude at least approximating that of a vertically-polarized component of the signal.

2. The screen antenna as in claim 1, wherein the entry and exit segments join the loop proximate each other and proximate a corner of the loop.

3. The screen antenna as in claim 1, wherein, when the dielectric is fitted to the vehicle, the said edge of the dielectric is a bottom edge.

4. The screen antenna as in claim 2, wherein, when the dielectric is fitted to the vehicle, the said edge of the dielectric is a bottom edge, and the corner of the loop is a bottom corner.



5. The screen antenna as in any preceding claim, wherein the dielectric is a window of the vehicle.

6. The screen antenna as in any preceding claim, wherein at the said edge of the dielectric the entry segment is adapted to connect to a feedline, and the exit segment is adapted to connect to vehicle ground.

7. The screen antenna as in any one of claims 1 to 5, wherein at the said edge of the dielectric the entry segment is adapted to connect to a feedline, and the exit segment connects to a stub segment that extends generally parallel to the first edge of the dielectric for capacitive coupling to vehicle ground.

8. The screen antenna as in claim 7, wherein the stub segment is adapted to extend with separation distance less than approximately 5mm from a vehicle ground surface proximate the said edge of the dielectric.

9. The screen antenna as in claim 8, wherein the length of the stub segment and its separation distance from the vehicle ground surface are selected such that the stub segment is able to receive low-frequency broadcast signals.

10. The screen antenna as in any one of claims 1 to 5, wherein at the said edge of the dielectric the entry

segment is adapted to connect to a feedline, and the exit segment is adapted to connect to one end of resonator circuitry the other end of which connects to vehicle ground.

11. The screen antenna as in claim 10, wherein the resonator circuitry is a discrete electronic circuit comprising an inductor means and a capacitor means connected in series.

12. The screen antenna as in claim 10 or 11, wherein the resonator circuitry also includes a tuning means.

13. The screen antenna as in any preceding claim, wherein the antenna also comprises a switch means for disconnecting the exit segment from a signal ground and connecting it instead to the entry segment.

14. The screen antenna as in any preceding claim, wherein the loop has a generally rectilinear configuration.

15. The screen antenna as in any preceding claim, wherein the loop is generally configured as a rectangle having its longer sides extending generally horizontally when the dielectric is fitted to the vehicle.

16. The screen antenna as in any preceding claim, wherein, when the dielectric is fitted to the vehicle, the loop extends at between approximately 50mm and approximately 100mm from the edges of the dielectric.

17. The screen antenna as in any preceding claim, wherein the loop is positioned generally centrally on the dielectric.

18. The screen antenna as in any preceding claim, wherein the dielectric is a rear window or rear quarter window of a station-wagon type of vehicle.

19. The screen antenna as in claim 17, wherein a signal feedline connectable to the entry segment is positioned on the body of the vehicle so as to be below a body aperture adapted to receive the respective rear window or rear quarter window and so as to be proximate a corner of the vehicle body.

20. A screen antenna substantially as herein described with reference to and as shown in the accompanying drawings.

### INTEGRATED LOOP ANTENNA FOR VEHICULAR APPLICATIONS

A vehicular screen antenna includes a conductor extending on a dielectric, such as a window. The conductor is configured as a loop having entry and exit segments, the loop being positioned generally centrally on the dielectric. The entry and exit segments extend proximate each other from the loop towards a first edge of the dielectric and are oriented on the dielectric so as to extend generally vertically when the dielectric is fitted to a vehicle.

(Figure 3 for publication)

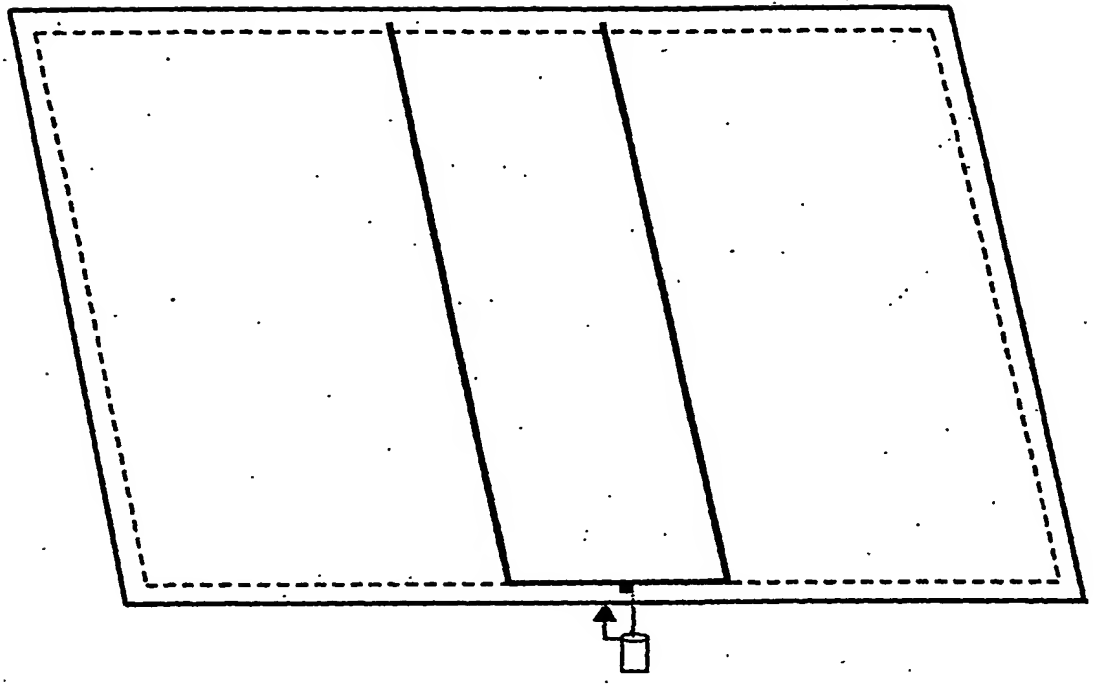


FIGURE 1

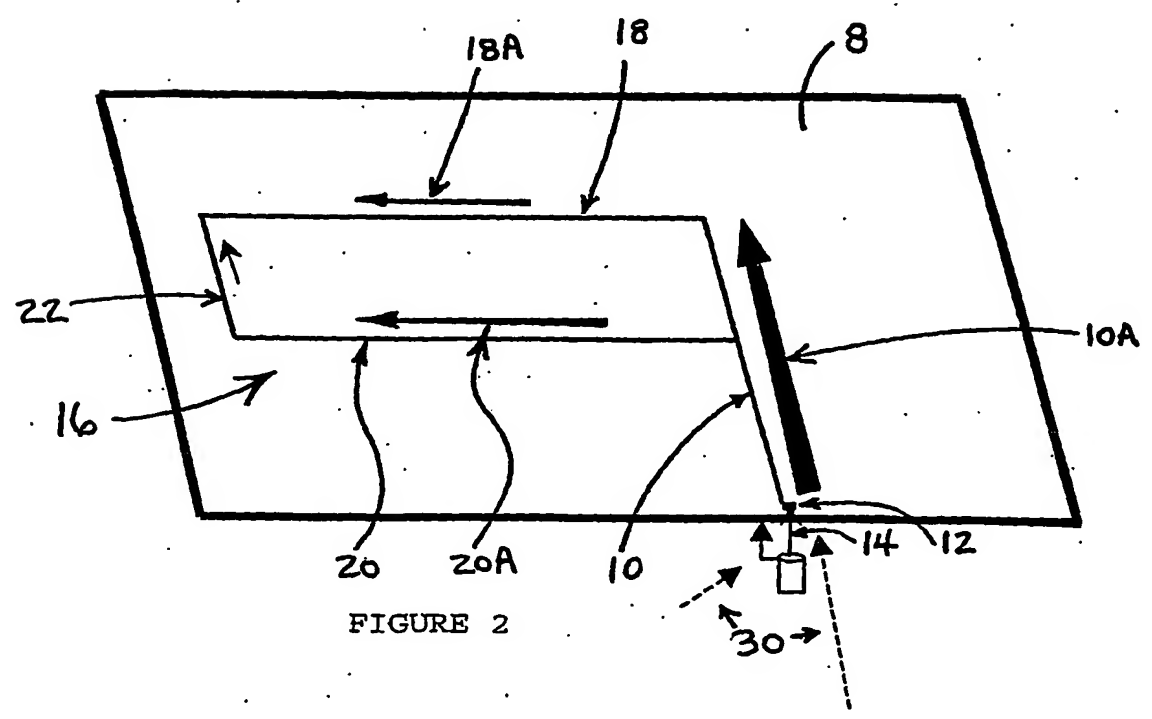


FIGURE 2

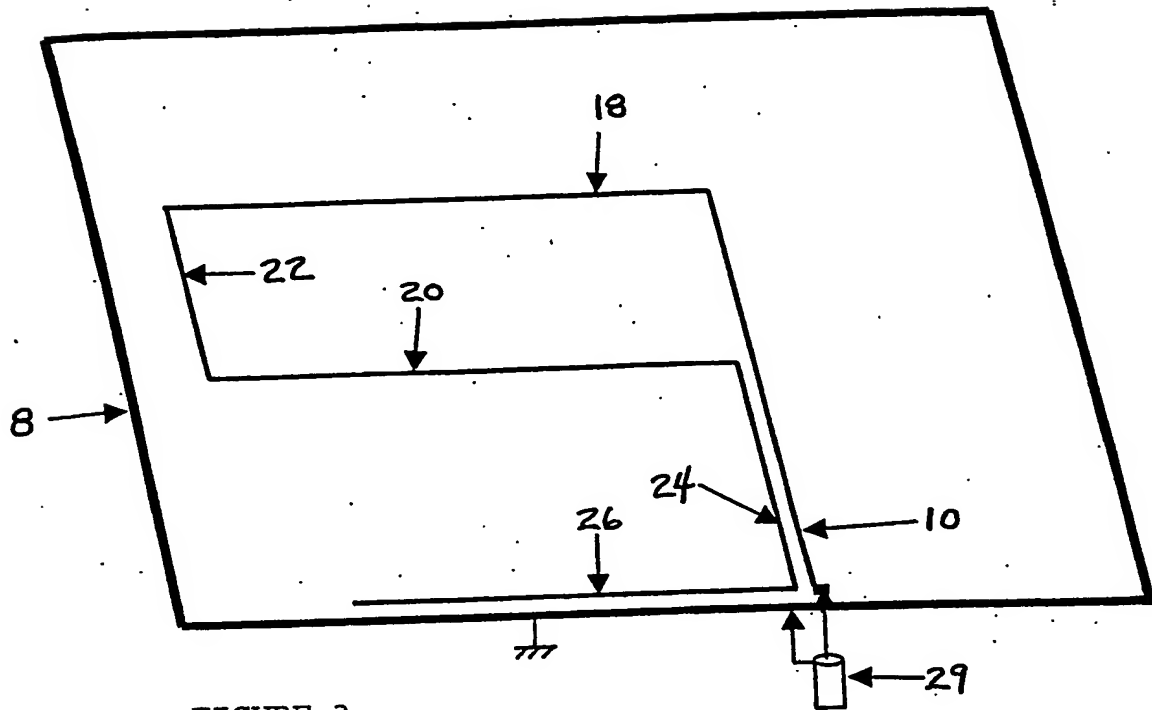


FIGURE 3

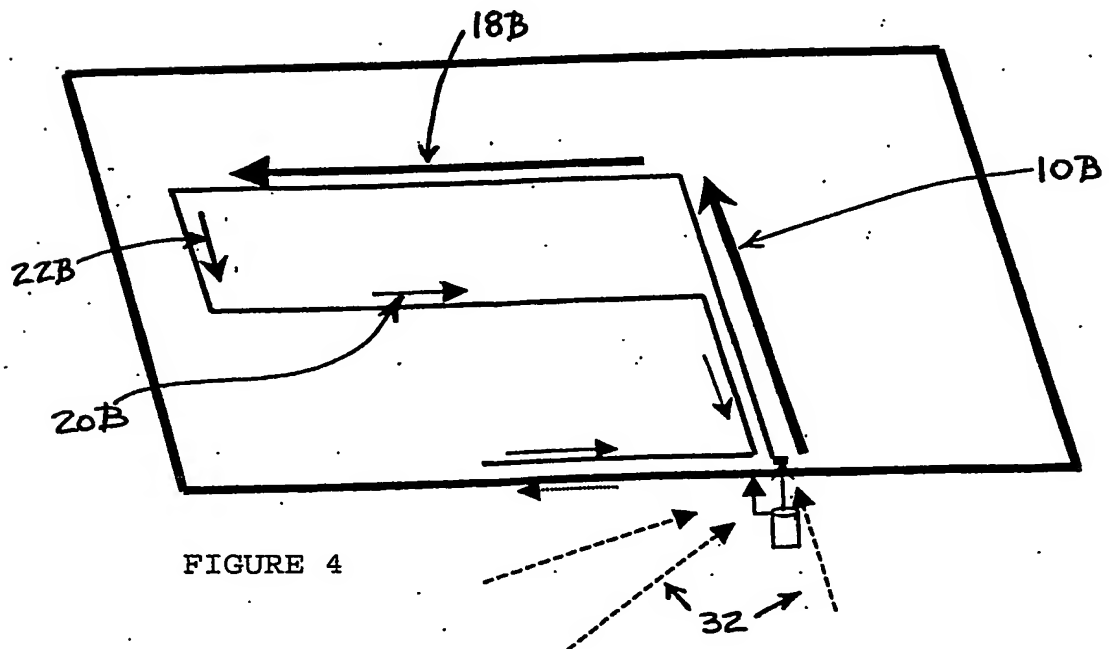


FIGURE 4

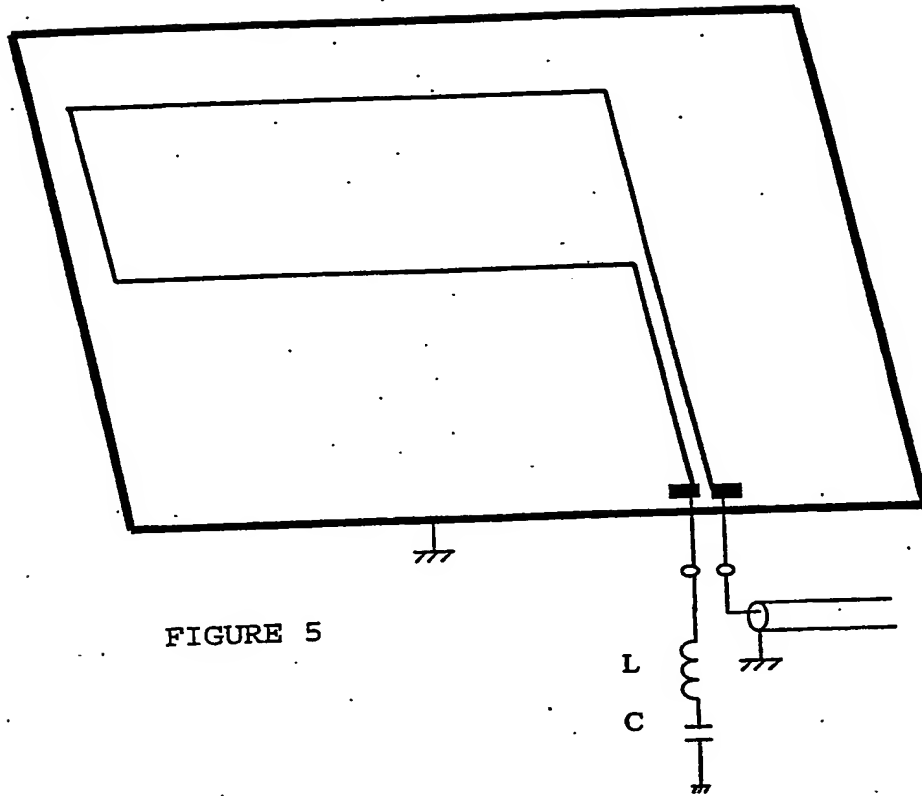


FIGURE 5

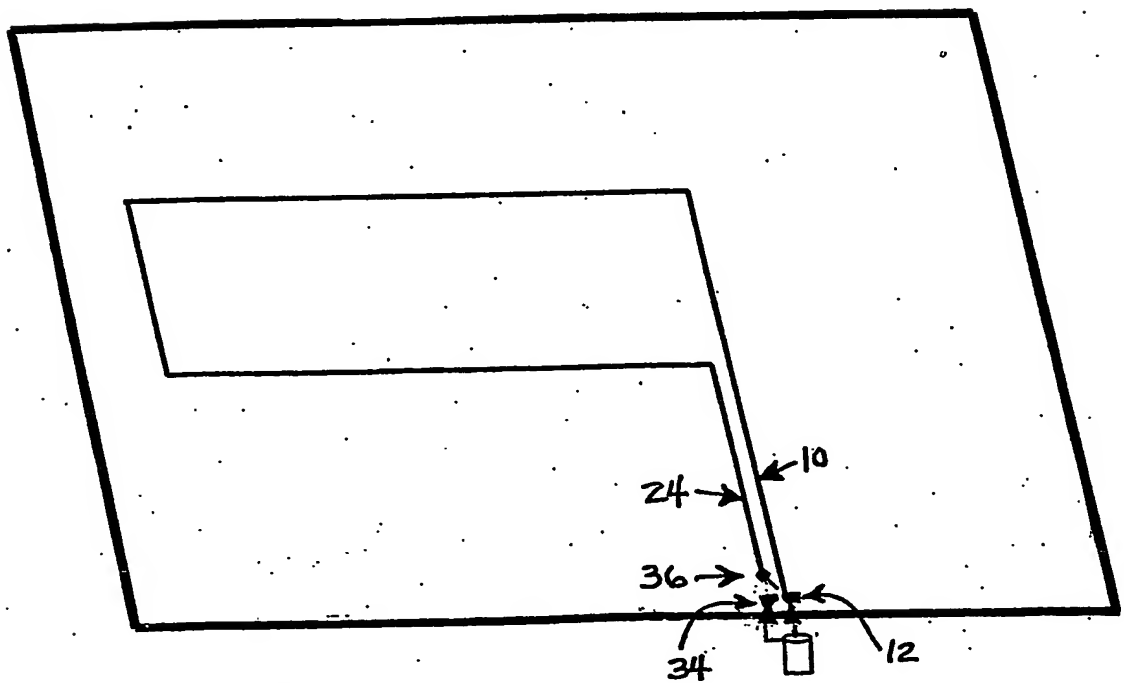


FIGURE 6

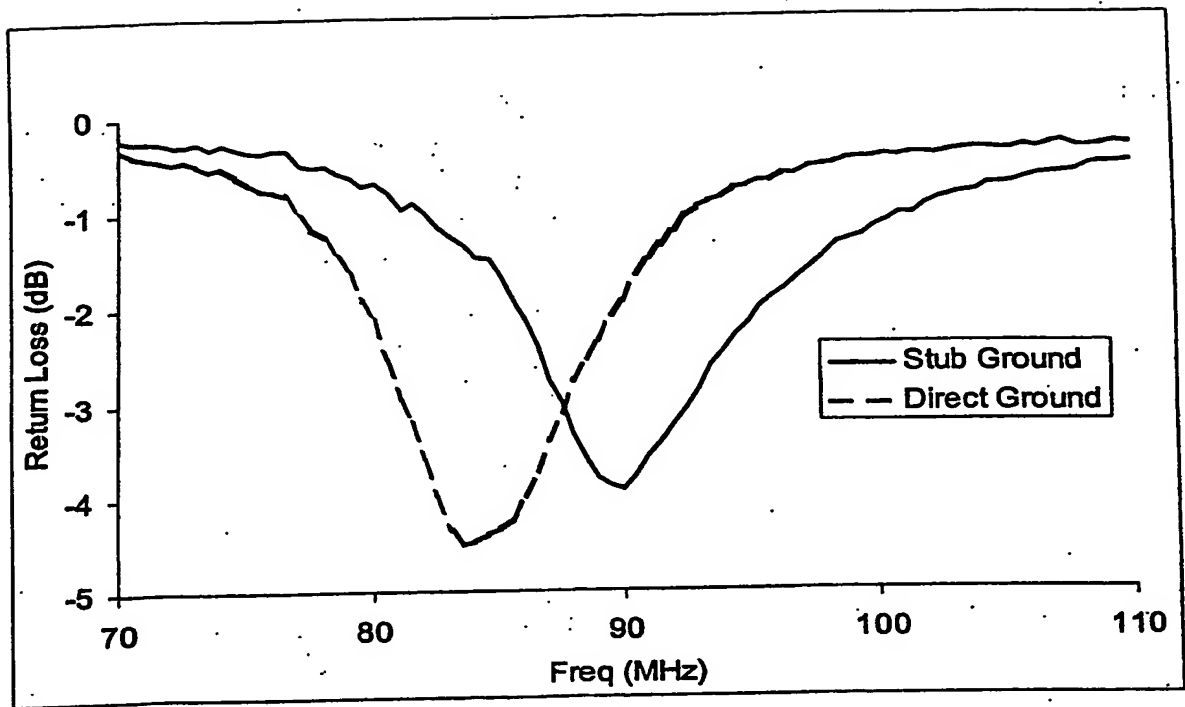


FIGURE 7

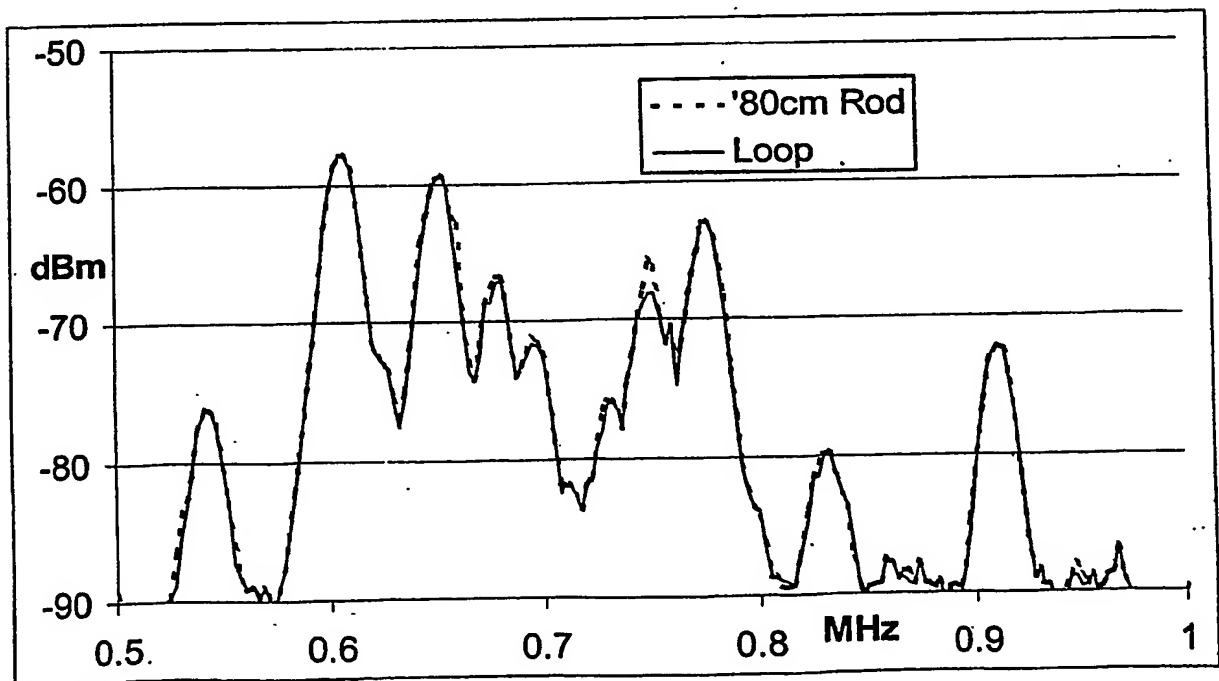


FIGURE 8



VERTICAL


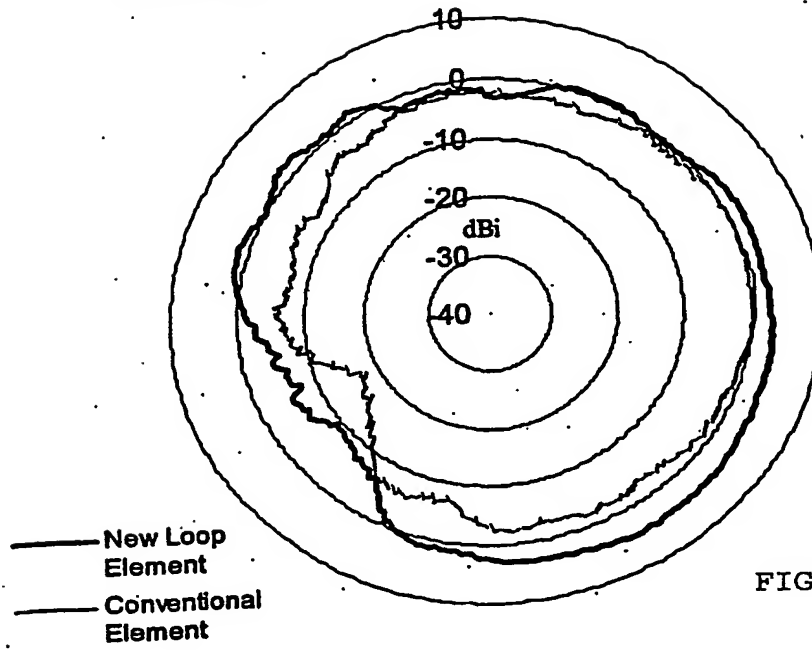


FIGURE 9 (a)

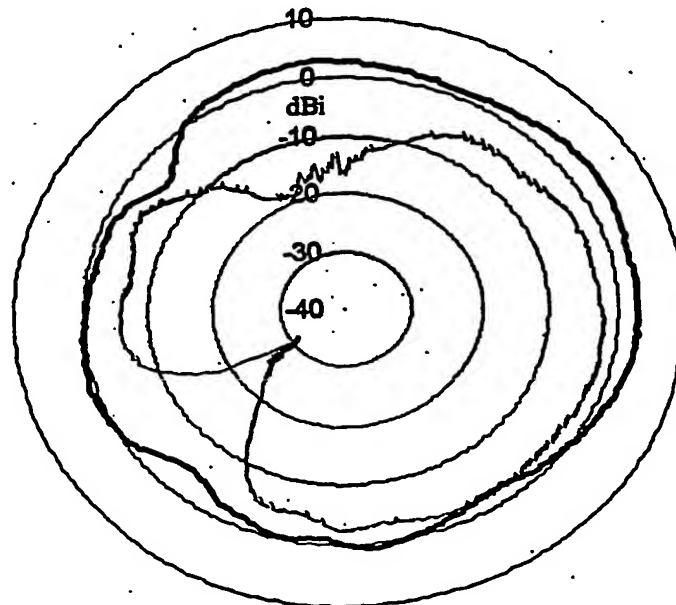

HORIZONTAL

FIGURE 9 (b)